


## Browser Based Networked Disc Publishing Systems

Featuring TrueNet LX, the world's leading Web Browser Based disc publishing software, the NS2100 is a truly platform-independent publishing solution, and comes without the need to maintain an embedded Windows, Linux or Mac OS server. Next generation robotics combined with an easy-to-use yet powerful Web Browser user interface provides the ideal solution to

easy disc publishing across multiple computer platforms such as Windows (32 & 64 bit), Mac OSX and Linux, simultaneously on the same network. Because the system is controlled by the java-enabled web browser, there is no client software or printer drivers to install!

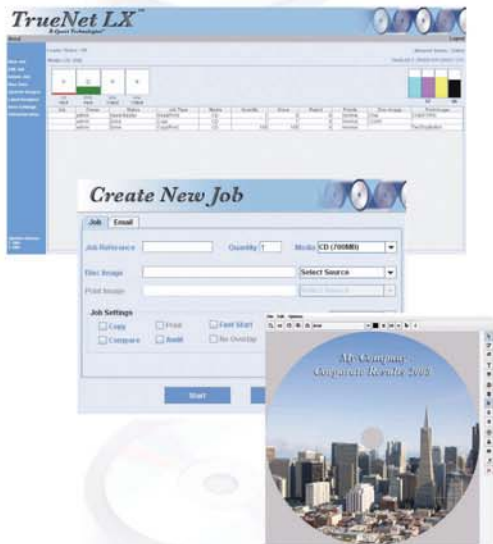

- 2 High Speed CD/DVD Recorders
- Blu-ray Recorders Available
- 5 Simultaneous Users (upgradable)
- Simple Stand-alone Operation via LCD Touchpad
- Integrated 4800dpi Disc Printer
- Windows, Mac & Linux Compatibility
- Small Footprint - Fits on Most Desktops
- Auto Format Recognition
- Store Images on Internal Hard Disk
- Live Hopper / Media Levels

- 150 Disc Input / Output
- Mixed Media (CD & DVD available simultaneously)
- Built-In Label Designer - Runs in web browser
- Role-Based User Security & Access Control
- EMail Event Notifications (user selectable)
- Job Priorities (can be changed by Administrator)
- Collated Multi-Disc Sets
- Upgradable to TrueNet FX
- Gigabit Network Connectivity
- Live Printer Ink Levels

## Browser Based Networked Disc Publishing Systems

Screen Shots From TrueNet LX



Windows XP & Vista  
(32 & 64bit)



Mac OSX



Linux



Drag & Drop  
Mastering



Creating Jobs



Creating Disc  
Sets



E-Mail Settings



Live Job  
Editing



Built-In  
Label Designer

Product Code Recorder Options

NS2100i	2 High Speed CD / DVD Recorders
NS2100BDi	2 High Speed CD / DVD / Blu-ray Recorders

Drives/ Capacity	Software / Networkable	Memory / HDD	Weight / Dimensions	Power / Environment
2 / 150	TrueNet LX Software  Upgradable to TrueNet FX	160 GB HDD 1GB Memory	55lbs (25kg) approx. / 24"D x 17"W x 15"H (cm: 61D x 43W x 38H) approx.	110v / 220v Auto Switch Power. Consumption - 250W Environment: Temperature 40-95°F (5-35°C) Humidity 20%-80% non-condensing

### Upgrade to TrueNet FX adding even more features :

- Up to 25 Users
- Up to 99 Discs Per Collated Set
- Easy-to-use Dynamic Labels with User Defined Form Fields
- Easy-to-use Label Serialization
- Easy-to-use Dynamic 'Mail Merge' functionality
- TrueNet API Functionality - Create fully automated back end solutions